
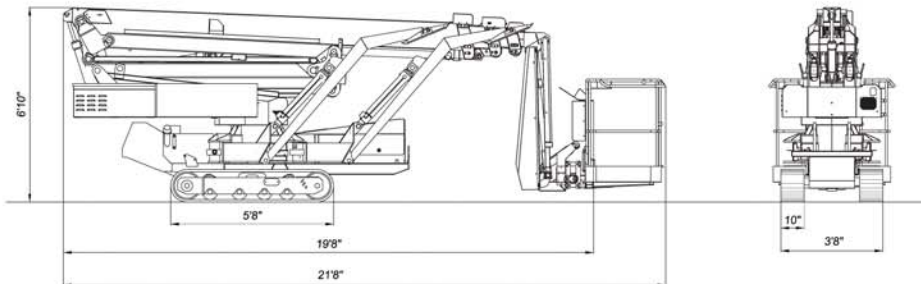


TRACKED LIFTS 2500RX

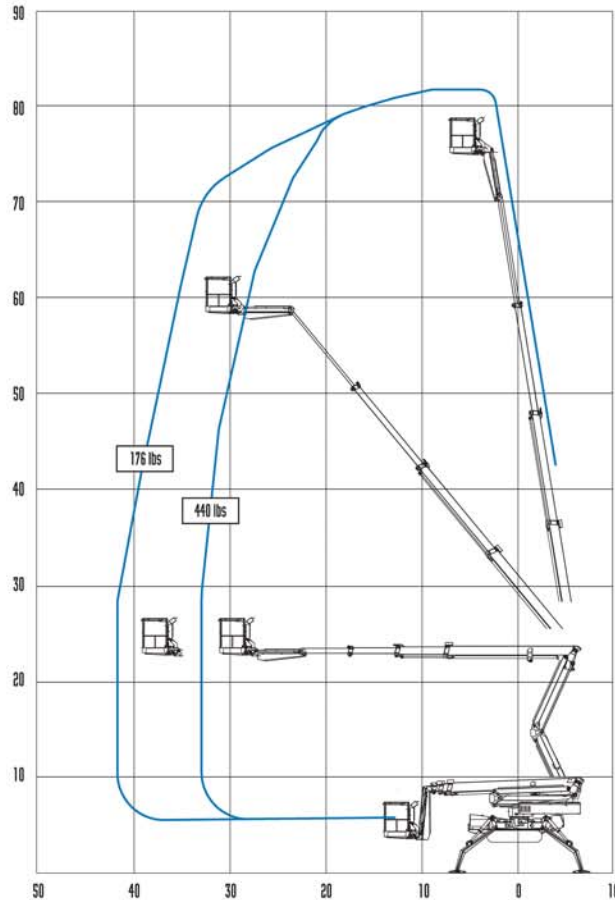

TECHNICAL DATA 2500RX

Manufacturer's Model	Omme 2500RX
Max. working height, ft	82'
Max. side reach, ft	42' 7"
Rotation	± 355°
Max. basket load, lbs	440 lbs
Basket size, ft (w x l x h) *detachable	4'1"x2'6.5"x3'8"
Basket Rotation	± 41°
Moveable Jib Range	90°
Battery	24V/200Ah/5h
Charger	24V/30 A
Diesel engine, Kubota D722	14 kW/18.8 hp
Transport length, ft	21'8" (19'8" w/o basket)
Transport height, ft	6'10"
Transport width, ft	3'8"
Outrigger Spread-Wide, ft	17'5"/15'0" (max/min)
Outrigger Spread-Narrow, ft	10'6"/9'4" (max/min)
Total weight, lbs	8745 lbs
Gradeability - up hill	19.3° (35%)
Gradeability - cross hill	16.7° (30%)
Deployment ability	21.8° (40%)
Crawler track length, ft	5'8"
110V outlet in basket, Max. 10A	Standard
Manual Emergency Lowering	Standard

Battery only (400 Ah) version available

ANSI compliant

OPTIONS

- » 1-man basket
- » Fiberglass basket insulated to 1000V
- » Spotlight in the basket
- » Intercom
- » Flashing beacon lights on boom and stabilizers (5)
- » Radio Remote Control Drive
- » Auto Leveling
- » White Rubber Tracks
- » 2nd Electric Drive Motor
- » Increased battery capacity, 400Ah
- » Variable Width Undercarriage 3'8" - 4'11"
- » Custom Colors